



**AGL Series**, new from NK Technologies, is a large aperture ground fault sensor that offers one of the largest aperture diameters in the industry while maintaining a compact overall profile. Intended for sensing earth leakage in applications up to 600A, the AGL Series offers a choice of N.O. or N.C. latching relays or an SPDT Form C relay with auto-reset. Enclosure features integral DIN-rail mounting as standard and optional noise immunity coatings for applications in harsh EMI/RFI environments.


## AGL SERIES

### Large Aperture Ground Fault Sensors

#### Applications

- Replace bulky two-piece sensor solutions which require separate CTs or relay modules.
- Use with shunt trip breakers to provide total ground fault protection to sensitive machine electronics.
- Detect ground faults in resistance/impedance heating, industrial automation and control, theatrical lighting, portable power distribution, and snow melt/heat trace applications.
- Sense progressive levels of ground fault in motors or heating systems to detect deterioration prior to catastrophic failure.


#### Moisture Ingress on a Submersible Pump Motor

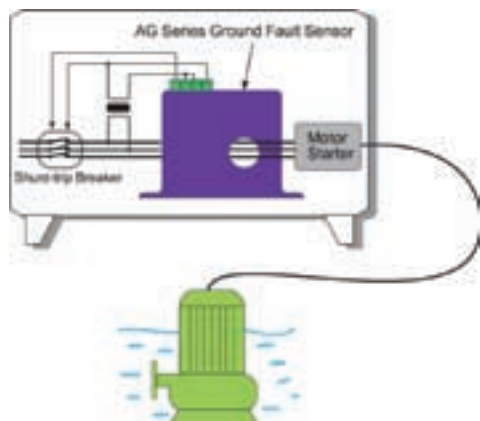

#### Features


- **Integral DIN-rail Mount with Spring Loaded Mounting Clips**
- **Setpoint Options Include Factory Adjustable Setpoint from 5mA -100mA or "TR3 Tri-Set" Models with Field-selectable 5/10/30mA Settings**
- **Finger-safe Terminals for Worry-free Installation and Operation**
- **Aperture Orientation is Perpendicular to DIN-rail, Allowing for Clean and Efficient Wiring and Minimizing Space Between Multiple Components**
- **Choice of Dependable Latching SPST or SPDT (Form C) Electromechanical Relay Outputs**
- **Uses "Zero Sum" Operating Principle to Reliably Sense Imbalance in Magnetic Fields Associated with Current Leakage to Ground**
- **Typical Response Times from 15ms to 200ms**
- **Integral "Push-to-test" Button with LED Indication of Contact Status**

## Dimensions

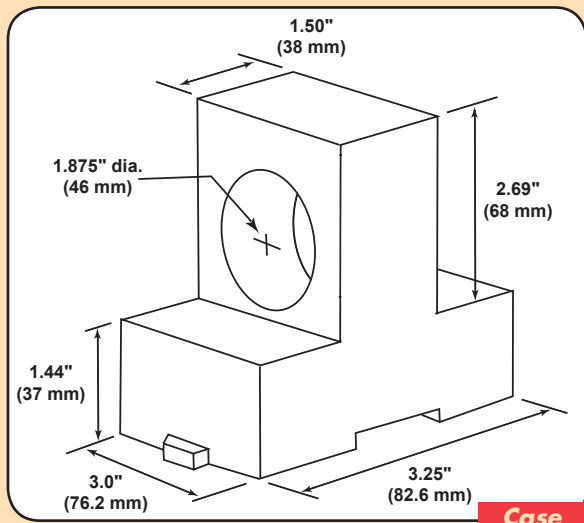

Case

## Connections

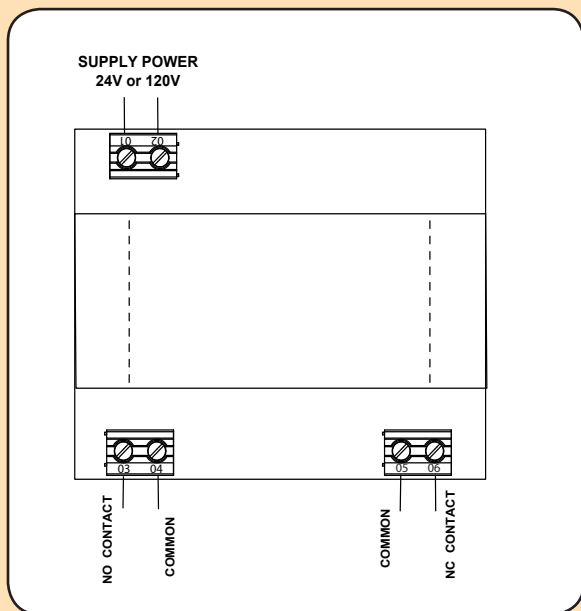

## Specifications

<b>Setpoint Range</b>	Factory calibrated models (specify when ordering):
	<ul style="list-style-type: none"> <li>● AGL1: 5–100mA (005–100)</li> <li>● AGL2: 80–950mA (080–950)</li> </ul>
	TR3 "Tri-set" models (field jumper select):
	<ul style="list-style-type: none"> <li>● AGL3: 5, 10, or 30mA</li> </ul>
<b>Output</b>	<ul style="list-style-type: none"> <li>● Auto Reset: SPDT Relay 1A @ 125VAC, 2A @ 30VDC</li> <li>● Latching: SPST Relay 1A @ 125VAC, 2A @ 30VDC</li> </ul>
<b>Response Time</b>	<ul style="list-style-type: none"> <li>● 200ms @ 5% above trip point</li> <li>● 60ms @ 50% above trip point</li> <li>● 15ms @ 500% above trip point</li> </ul>
<b>Isolation Voltage</b>	5000VAC (tested)
<b>Frequency Range</b>	50–60 Hz (monitored circuit)
<b>Noise Immunity Option</b>	<ul style="list-style-type: none"> <li>● EMI/RFI Shielding</li> <li>● Power supply noise filtering</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>● 120VAC (55–110% of nominal voltage)</li> <li>● 24VAC/VDC (+/- 10% of nominal voltage)</li> <li>● Green LED = Power On indication</li> </ul>
<b>Case</b>	UL94 V0 Flammability Rated
<b>Environmental</b>	-4 to 122°F (-20 to 50°C), 0–95% RH, non-condensing

## Ordering Information\*

Sample Model Number: AGL1-NOR-120-LA-005

Ground fault sensor with normally open SPST latching relay output, 120VAC power supply and 5mA trip point.



### (1) Setpoint Range

1	5–100mA factory set
2	80–950mA factory set
3	5/10/30mA jumper set

### (2) Output Type

NCR1	Normally Closed SPST Relay Form B (Available only with -LA option)
NOR1	Normally Open SPST Relay Form A (Available only with -LA option)
SDT1	SPDT Relay (Form C) with auto-reset (available only with -DEN and -ENE options)

### (3) Power Supply

120	120VAC
24U	24VAC/VDC

### (4) Options

ENE	Normally Energized, auto-reset (SDT1 output only)
DEN	Normally De-energized, auto-reset (SDT1 output only)
LA	Latching (NOR1 and NCR1)

### (5) Setpoint

TR3	Tri-set
005 to 950	Factory set trip point in mA

### (6) Noise Immunity

N	Noise Immunity
	None (blank)

\*Contact factory for specific model availability.